

Detail Issued For Guidance Only,
Designer's Approval Required

Site construction sequencing should be assessed before the appropriate Visqueen Standard Detail is selected & approved by the Designer


Detail is subject to SE approval

Tie bar loop

Visqueen SAM on Visqueen HP Tanking Primer (prime concrete only)

Visqueen Axiom UniSeal angle fillet (20mm x 20mm) & extended 150mm around tie bar horizontally

Concrete to have smooth float finish

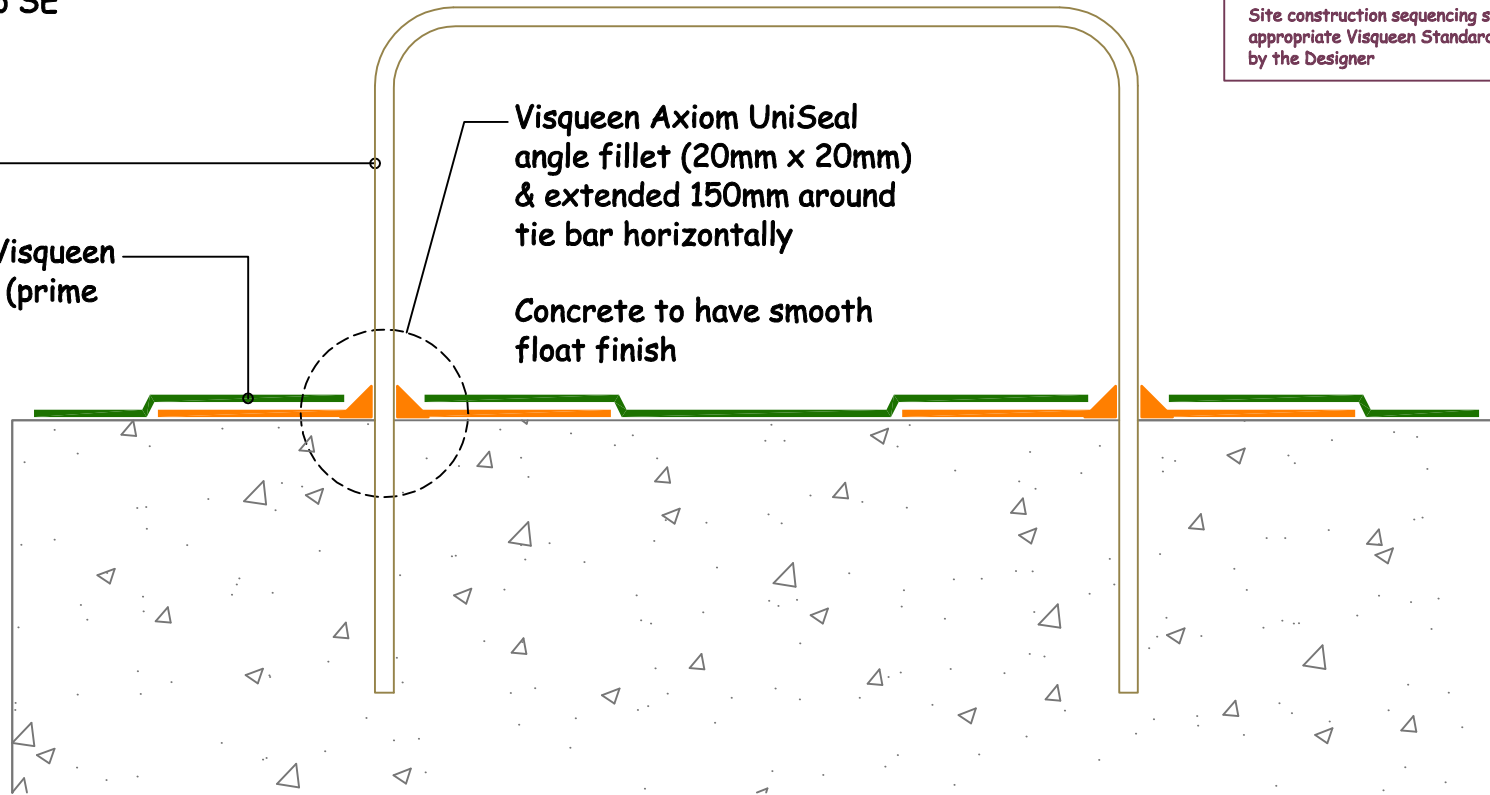

TYPICAL TIE BAR LOOP DETAIL - Option 1

NB ; DO NOT SCALE - USE FIGURED DIMENSIONS ONLY.

VISQUEEN AXIOM
LIQUID WATERPROOFING SYSTEM

Visqueen Building Products
Contact Technical Support :
t : 0333 202 6800
f : 0333 202 6886
e : enquiries@visqueenbuilding.co.uk
www.visqueenbuilding.co.uk

Project: Standard Detail : Visqueen Axiom Liquid Membranes.

© COPYRIGHT RESERVED.

AX-02	Ground Bearing Slab	Axiom UniSeal	-	Liquid Membrane
-------	---------------------	---------------	---	-----------------

In order to develop a robust design for protecting a structure against groundwater, a risk assessment must be carried out in line with the guidance given in BS8102:2009

The designer may need to specify one or a combination of waterproofing measures