
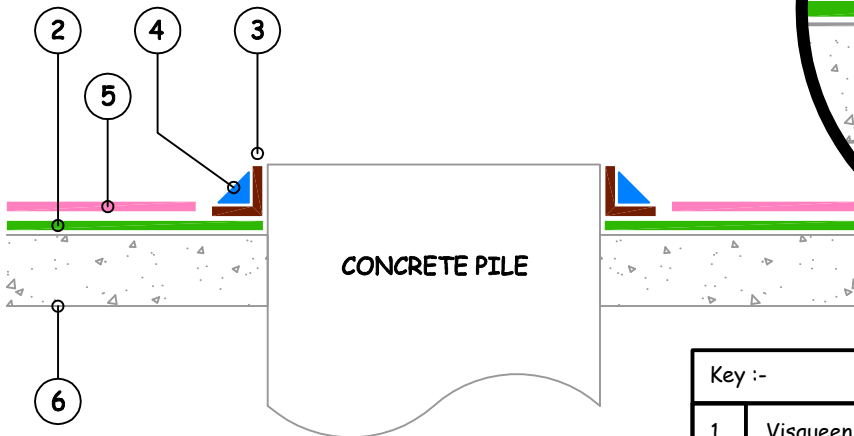
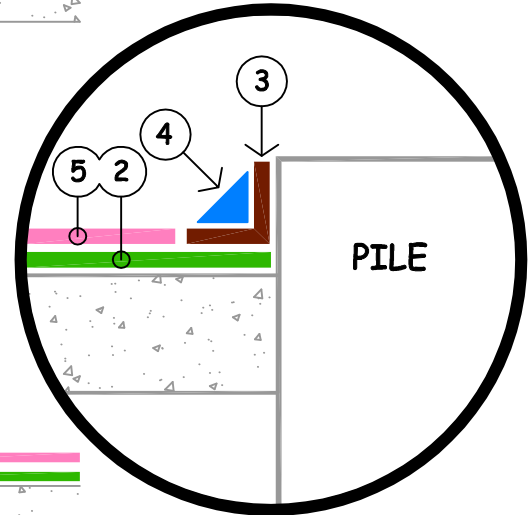
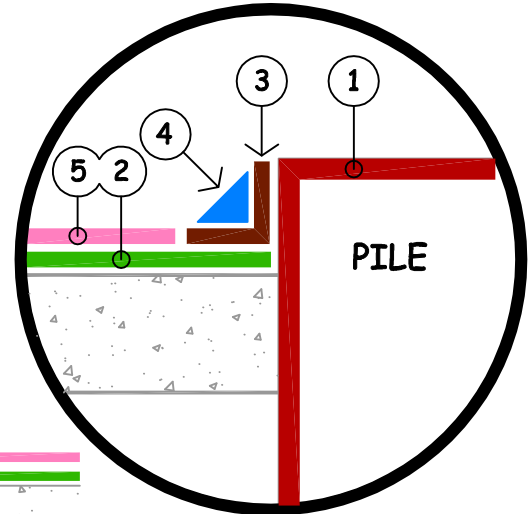


Detail Issued For Guidance Only,
Designer's Approval Required

Site construction sequencing should be assessed before the appropriate Visqueen Standard Detail is selected & approved by the Designer

HIGH RISK : HYDROSTATIC PRESSURE

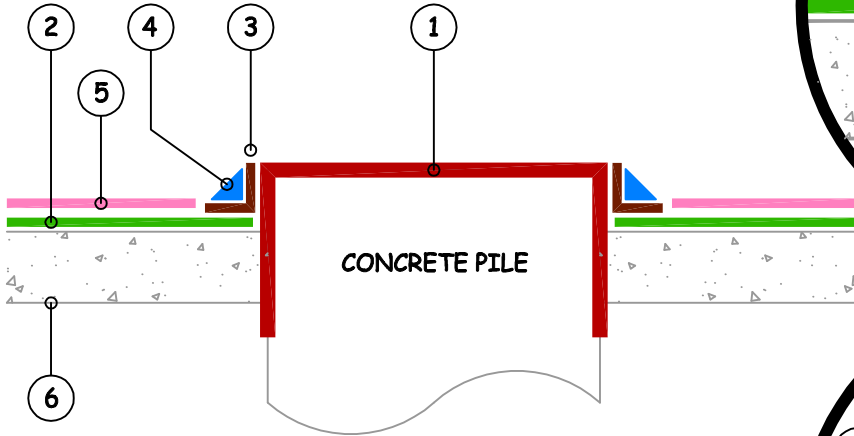

LOW RISK : HYDROSTATIC PRESSURE

Key :-

1.	Visqueen Pile Cap Sealer.
2.	Visqueen SAM on Visqueen HP Tanking Primer.
3.	Visqueen Waterstop Mastic.
4.	Visqueen VX90 Waterstop.
5.	Visqueen TreadGUARD 1500.
6.	Smooth (float finish) concrete blinding layer.

NB; DO NOT SCALE - USE FIGURED DIMENSIONS ONLY.

VISQUEEN STRUCTURAL WATERPROOFING

Visqueen Building Products
Contact Technical Support :
t : 0333 202 6800
f : 0333 202 6886
e : enquiries@visqueenbuilding.co.uk
www.visqueenbuilding.co.uk

Project: Standard Detail : Typical Pile Cap Sealing Method.

Drg No.- PCS-SAM-01.

Date.- 02/15.

Scale.- NTS.

© COPYRIGHT RESERVED.